
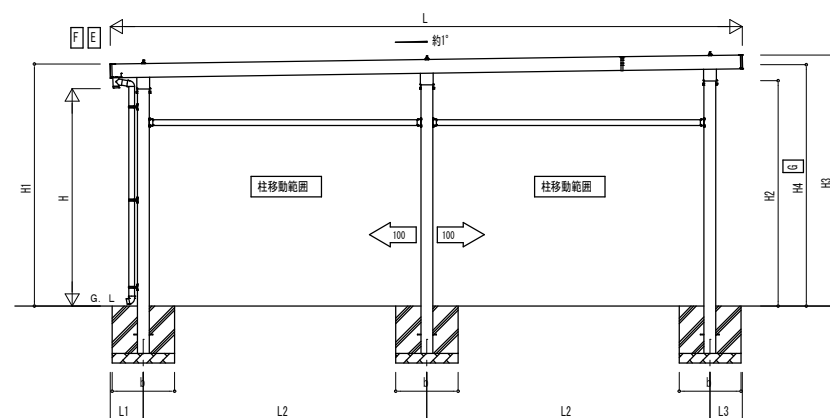


Technical drawing of a rectangular frame. The overall height is labeled L . The overall width is labeled D . The distance between the two vertical bars is labeled D_1 . The distance between the two horizontal bars is labeled D_2 . The distance between the two vertical bars, including the width of the bars, is labeled D_3 . The drawing shows a rectangular frame with four corner joints. The joints are represented by small squares with a cross inside. The bars are represented by thick lines. The dimensions are indicated by dimension lines with arrows.

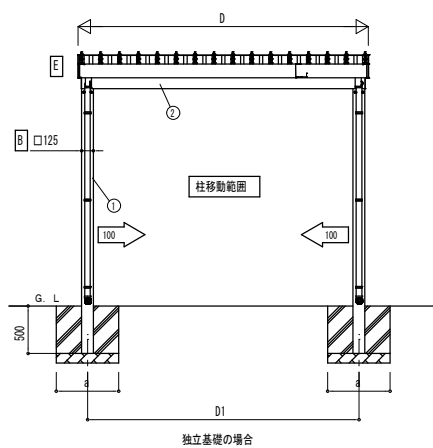

間口呼称	奥行呼称	独立基礎			土間コンクリート考慮基礎			土間コンクリート同時施工基礎		
		地耐力 [kN/m ²]			地耐力 [kN/m ²]			地耐力 [kN/m ²]		
		30	50	100	30	50	100	30	50	100
		a・b	a・b	a・b	a・b	a・b	a・b	a・b	a・b	a・b
30	55+12	910	630	420	910	630	420	880	620	460
36		990	690	460	990	690	450	960	680	530

間口 呼称	奥行 呼称	アンカー 本数
30	55+12	2
36		

間口呼称	奥行呼称	D	D1	L	L1	L2	L3
30	55+12	3070	2873	6691	350	3000	341
36		3670	3473				

間口呼称	奥行呼称	高さ呼称	H	H1	E	H2	H3	E	H4	G
30	55+12	23	2300	2561		2386	2657		2556	
36				2651			2747		2646	

主要部材	材質	表面処理
①柱	アルミニウム合金 押出材	陽極酸化塗装複合被膜
②梁	アルミニウム合金 押出材	陽極酸化塗装複合被膜
③扉隠し(側面)	アルミニウム合金 押出材	陽極酸化塗装複合被膜
④扉隠し(水上側)	アルミニウム合金 押出材	陽極酸化塗装複合被膜
⑤扉隠し(水下側)	アルミニウム合金 押出材	陽極酸化塗装複合被膜