
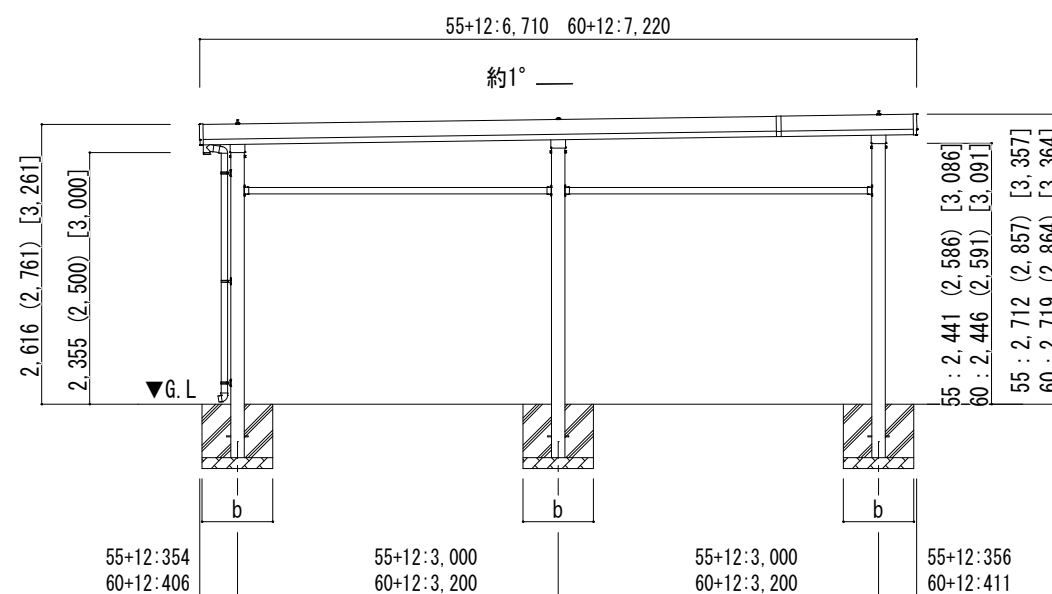


W	L	独立基礎			土間コンクリート考慮基礎			土間コンクリート同時施工基礎		
		地耐力 (kN/㎡)			地耐力 (kN/㎡)			地耐力 (kN/㎡)		
		30	50	100	30	50	100	30	50	100
		a・b	a・b	a・b	a・b	a・b	a・b	a・b	a・b	a・b
36	55+12	750	640	440	440	440	440	500	450	440
	60+12	770	670	460	460	460	460	520	480	470

Figure 10-10 shows two diagrams, (a) and (b), illustrating the reinforcement details for column-beam joints. Diagram (a) shows a joint with a height of 100 or more, and diagram (b) shows a joint with a height of 500 or more. Both diagrams indicate the required lap length (G.L.) and the distance from the end (200 or more).

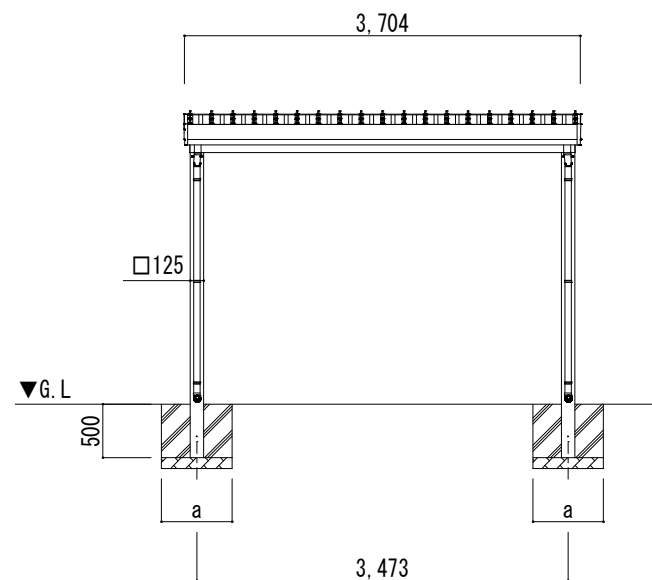

- | | | | | | | | | | | | |
|------|------|---|-----|-------------------------|--|--|--|--------------------------|-------------------|---|-----|
| 変更記事 | 設計監理 | 殿 | 工事名 | ゆき盛くんⅢ・耐風くんⅢ Light | | | | 照 査
担 当
作 図
尺 度 | 御受領印

年 月 日 |  | 図 番 |
| | 施 工 | 殿 | 図面名 | 積雪30cm仕様 1台用 奥行延長 柱6本仕様 | | | | | | | |

